




Modular ice maker - Vertical evaporator system Daily production up to 145 kg

Hotel
Restaurant
Fast food
Bar
Disco
Fish market
Supermarket
Medical & SPA
Industry

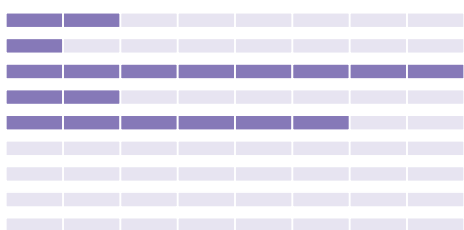

► Position n°



► Features & Plus

- Single and crystal cube
- AISI 304 SS Scotch Brite finish
- Tropical class +43°C
- Removable and cleanable air filter
- Air or water cooling system
- Easy cleanable internal rounded surface
- RoHS Free
- Electromechanical operation
- ON-OFF rocker switch
- Automatic washing system
- Standard and special voltages



Single and crystal cube



AISI 304 SS Scotch Brite finish




Removable and cleanable air filter

► Usable Bins

- Bin 110
- Bin 200
- Bin 240PE

► Available ice cube size



► Prod. 24h

°C	Air temp.		Water temp.		Kg	Lbs
	10° C	50° F	7° C	45° F	145	320
	21° C	70° F	15° C	60° F	140	309

2 Years Warranty
subject to limitations

► Certifications available for this model






Fast Ice

VM 350



Modular ice maker - Vertical evaporator system Daily production up to 145 kg

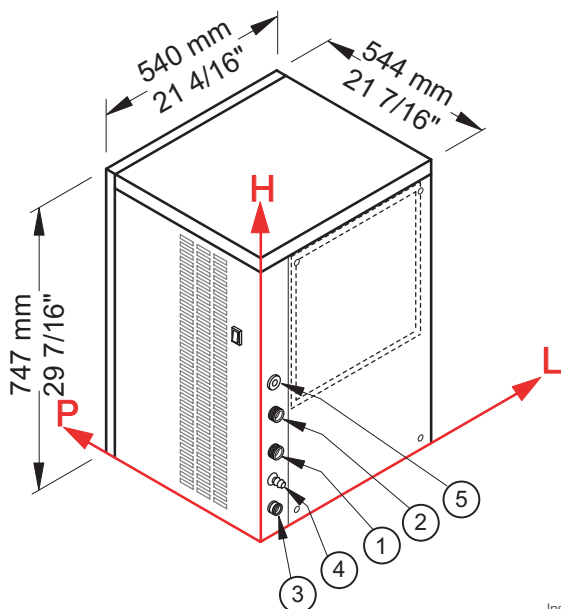

Installation



► Working conditions

- Location: **Indoor**

	Min	Max
Ambient temperature	+10° C / +50° F	+43° C / 110° F
Water temperature	+3° C / +37° F	+32° C / +90° F
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

► Performances

		Water temperature					
		7° C	45° F	15° C	60° F	21° C	70° F
		10° C	50° F	21° C	70° F	32° C	90° F
Air temperature	10° C	145 kg					
	50° F		320 lbs				
	21° C			140 kg			
	70° F				309 lbs		
	32° C					113 kg	
	90° F						249 lbs

► Connections

All measures are referred to the down-left corner (L-H-Ø)

- ① Water in.: 35 mm / 1 6/16" - 173 mm / 6 13/16" - 3/4"
- ③ Water out.: 32 mm / 1 4/16" - 42 mm / 1 10/16" - 24 mm / 15/16"
- ⑤ Electrical connections: 33 mm / 1 5/16" - 343 mm / 13 8/16"
- ② Cond. water in.: 35 mm / 1 6/16" - 268 mm / 10 9/16" - 3/4"
- ④ Cond. water out.: 28 mm / 1 2/16" - 93 mm / 3 11/16" - 12 mm / 8/16"
- ② ④ Only water cooling systems

► Technical information

Production in 24h	140 kg / 309 lbs
Cooling system	A - W
Kind of cube	7g
Refrigerant	R452A
Standard voltage	220-240 V ~ 50 Hz
Average power consumption	1400 W
Fuse	16 A
Finish	AISI 304 stainless steel, scotch brite

Water consumption	A: 3 l/kg - 35,9 gal/100 lbs
	W: 13,5 l/kg - 161,8 gal/100 lbs
Sizes (L-P-H mm)	540 - 544 - 747
(L-P-H in)	21 4/16 - 21 7/16 - 29 7/16
Sizes with pack (L-P-H mm)	580 - 615 - 925
(L-P-H in)	22 13/16 - 24 3/16 - 36 7/16
Net weight	73 kg / 161 lbs
Gross weight	83 kg / 183 lbs

All the technical information need to be considered at the following conditions:
Standard Cube (7 g)
Ambient temperature +21° C
Water temperature +15° C
Average power consumption at +43° C (standard voltage)

Models and specifications are subject to change without notice

Rev. 03 - Issued January 2025



www.bremagroup.it
info@bremoicegroup.it

We are Brema

